

**AE #195
CONVERT X**



DANGER:

Extremely flammable aerosol. Causes serious eye irritation. May cause drowsiness or dizziness. Keep away from heat/sparks/open flames/hot surfaces. No smoking. Do not spray on an open flame or other ignition source. **Pressurized container:** Do not pierce or burn, even after use. Avoid breathing gas. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear eye/face protection. Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 49°C/120°F. Dispose of contents/container in accordance with local/regional/national/international regulations.

FIRST AID:


IF ON SKIN: Wash with plenty of water. If skin irritation or rash occurs: Get medical advice/attention. Wash contaminated clothing before reuse. **IF IN EYES:** Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Get medical attention if irritation develops or persists. **IF INHALED:** Move to fresh air. Call a physician if symptoms develop or persist. **IF SWALLOWED:** Rinse mouth. Get medical attention if symptoms occur.

CONTAINS/CAS NUMBER:

Acetone (67-64-1), Dimethyl Ether (115-10-6), Isobutane (75-28-5), Ethylene Glycol (107-21-1), Isopropyl Alcohol (67-63-0), Propane (74-98-6), Tannic Acid (1401-55-4), and Oxalic Acid (144-62-7).

Sold By:

ALAN ENVIRONMENTAL PRODUCTS, INC.
PO Box 934 • Monmouth, IL 61462
Toll Free: 800-991-3765
Fax: 877-991-3010
www.alanenvironmental.com

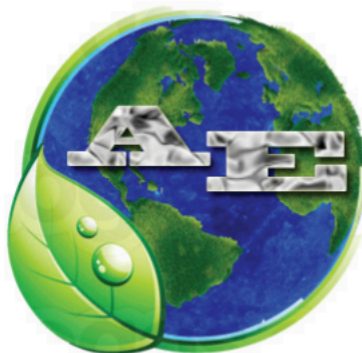

Alan Environmental Products, Inc.
Leading the way through green chemistry.

**AE #195
CONVERT X**

**Converts Rust To Form A
Stable Paintable Surface**

- ELIMINATES THE NEED FOR SCRAPING, SANDBLASTING OR PRIMING RUSTY SURFACES
- PROTECTS FROM FURTHER RUSTING ON SURFACES EXPOSED TO RAIN, SUN AND SALT SPRAY

KEEP OUT OF REACH OF CHILDREN

DANGER

**EXTREMELY FLAMMABLE.
MAY CAUSE BURNS TO EYES, SKIN, AND
RESPIRATORY TRACT.
CONTENTS UNDER PRESSURE.**

Read carefully other cautions on back panel.

NET WT: 13 OZ (369 g)

DESCRIPTION

When applied to any rusty surface, it will convert the residual rust to a protective polymeric coating. This inert protective coating prevents further rusting and corrosion.

DIRECTIONS

For best results prepare surface by brushing the loose rust from the surface using a wire brush or sand paper. Clean the surface to remove grease and grime. Shake well before use.

Hold can 8-12 inches from surface and spray a thin coat onto the surface. After the surface has dried, apply a second thin coat. Allow 48 hours to completely cure before painting while protecting it from rain or dew.

For long lasting protection, seal with two coats of a high quality oil based paint.

Do not apply if the surface temperature is below 50°F or above 90°F. Store in a cool dry place, protected from freezing or temperatures above 100°F.

Cautions: Use with adequate ventilation. Intentional misuse by concentrating and inhaling the product can be harmful or fatal.

KEEP OUT OF REACH OF CHILDREN.

HMIS® RATINGS:
HEALTH - 2,
FLAMMABILITY - 3,
PHYSICAL HAZARD- 1,
PERSONAL PROTECTION - X.

*See Safety Data Sheet
for complete safety information.*

**24 HOUR MEDICAL EMERGENCY
1-866-836-8855**

**CONTAINS NO OZONE
DEPLETING CHEMICALS!**

8346.011116